




YAAO VALVE

Globe Valve Bolted Bonnet & Welded Bonnet

800LB

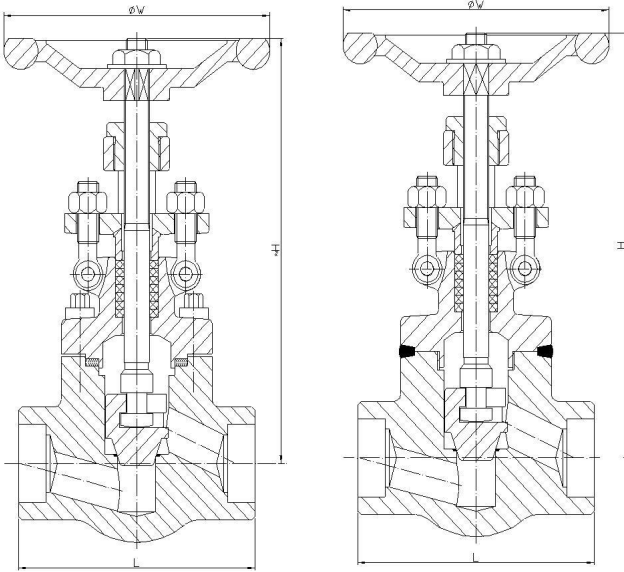

Design and Manufacturing: ASME B16.34, API602

Construction Type: BB, OS&Y

WB, OS&Y

Construction Length: MFR'S STD

End Connection: ASME B16.11 SW

ASME B1.20.1 NPT

Body Material: ASTM A105

ASTM A350-LF2

ASTM A182-F11/F12/F22/F5/F91

ASTM A182-F304/F304L/F316/F316L

ASTM A182-F321/F321H

Inspection and Testing: API598

Marking: MSS SP25

Standard Port

NPS	1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	2
DN	8	10	15	20	25	32	40	50
L (mm)	79	79	79	92	111	120	152	172
H/open(mm)	163	163	163	163	194	231	242	283
W (mm)	100	100	100	100	125	160	160	180
Weight (kg)	1.9	1.8	1.7	2.1	3.3	6.0	7.5	11.4

Full Port

NPS	1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	2
DN	8	10	15	20	25	32	40	50
L (mm)	79	79	92	111	120	152	172	220
H/open(mm)	163	163	163	194	231	242	283	323
W (mm)	100	100	100	125	160	160	180	235
Weight (kg)	1.7	1.7	2.1	3.3	6.0	7.5	11.4	15.0



YAAO VALVE

Globe Valve Bolted Bonnet & Welded Bonnet

1500LB

Design and Manufacturing: ASME B16.34, API602

Construction Type: BB, OS&Y
WB, OS&Y

Construction Length: MFR'S STD SW/NPT
ASME B16.10 BW

End Connection: ASME B16.11 SW
ASME B1.20.1 NPT
ASME B16.25 BW

Body Material: ASTM A105
ASTM A350-LF2
ASTM A182-F11/F12/F22/F5/F91
ASTM A182-F304/F304L/F316/F316L
ASTM A182-F321/F321H

Inspection and Testing: API598

Marking: MSS SP25

Standard Port

NPS		1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	2
DN		8	10	15	20	25	32	40	50
L (mm)	SW/NPT	92	92	111	111	120	152	172	220
	BW			216	229	254	279	305	368
H/open(mm)		163	163	194	194	231	242	283	323
W (mm)		100	100	125	125	160	160	180	235
	SW/NPT	1.9	1.9	3.5	3.5	6.2	7.7	13.4	17.0
Weight (kg)				4.0	4.0	7.0	9.0	16.0	19.0
	BW								

Learn more Valve products on <http://www.yaovalve.com/>

Copyright: Shanghai Yao Valve Co., Ltd.