



石家庄杜瓦贸易有限公司

SHIJIAZHUANG DUWA PIPING CO., LTD.



中国管道材料供应商

China Supplier of Piping Material


Web: www.dwpiping.com

Email: sales@dwpiping.com



Duwa Warehouse



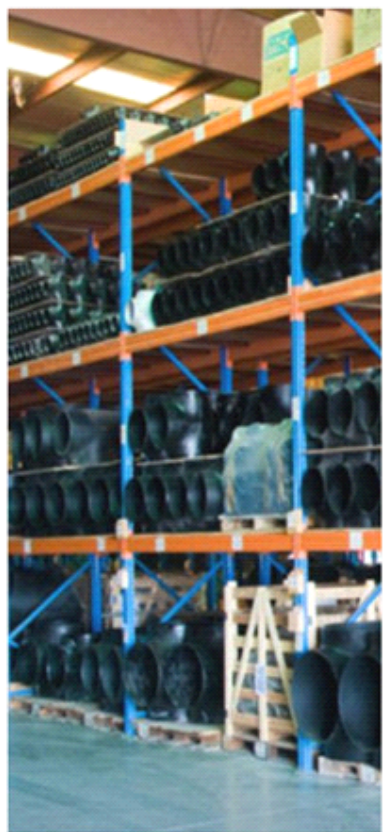

Butt-welded pipefitting



Types:

- 1 > .Elbows LR and SR
- 2 > .Tees straight and reducing
- 3 > .Reducers conc. And ecc.
- 4 > .Caps
- 5 > .Stub Ends

Manufacturing type:

- 1 > .Seamless Type
(Cold forming from seamless pipe)
- 2 > .One-seam Type
(Cold forming from welding pipe)
- 3 > .Two-seam Type (Pressed from Plate)

Size available:

- 1 > .From 1/2" x sch5s up to 100" x 200mm

Manufacturing Standard:

- 1 > .ASTM ASME A/SA 403
MSS SP43&SP75 ANSI B 16.9
ANSI B 16.28 ASTM A815
ASTM B 363 B366
- 2 > .DIN2605 DIN2615 DIN2616
DIN2617
- 3 > .GB12459 GB13401
- 4 > .JIS2313

Material:

Stainless Steel:

304/304L 316/316L 321

Titanium

Available from Stock:

WP304/304L, WP316/316L

A106-B, A53-B, A210-C, A333-6, A335-P1/P2,
P11, P22, P5, P9, P91, ST325.8, ST37, ST52.4, 1.0356,
1.7335, S355 series, A199-T22, API5L Gr.B, X42,
X46, X52, X56, X60, X65, X70, X80 and so on



Seamless Steel Pipes/Tubes



Manufacturing Type: Seamless Type
Cold Drawn from Hollow Bar
(Annealed and Pickled)


Size available:
From 6mm N.P.S. x 0.4mm up to
24 " O.D. x 30mm Wall Thickness—seamless

Manufacturing Standard:
ASTM ASME A/SA 312 A/SA269
A/SA 213 ANSI B 16.25 ASTM A790
DIN17456 DIN17458 GB14976

Material:

Stainless Steel: 304/304L 316/316L 321 310s
A106-B, A53-B, A210-C, A333-6, A335-P1/P2,
P11, P22, P5, P9, P91, ST325.8, ST37, ST52.4,
1.0356, 1.7335, S355 series, A199-T22, API5L Gr.B,
X42, X46, X52, X56, X60, X65, X70, X80 and so on

Manufacturing leading time: 25 Days
Available From Stock:
N.P.S. 3/4 " -100 " Sch10(s) -200mm

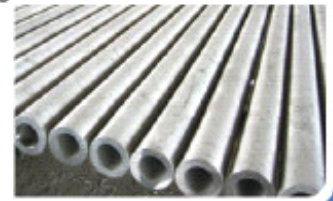

优势所在

- 1、生产及仓储多余6,500吨钢管、管件、法兰，国标、美标、德标、日标，无缝、焊接。
材料：碳钢，低温钢，不锈钢，合金钢.....
- 2、机械加工：表面加工，内外面加工，螺纹加工，倒角，切割弯头为不同角度、弯头倒角成不同形状，钢管煨弯，管线加工、组合.....
- 3、防腐处理：酸洗，钝化，电镀，热镀锌，热处理，喷砂，滚砂等。
- 4、材料检验：第三方检验：3.1A TUV, 3.1C TUV, GL, LRS, DNV, BV, ABS, RINAS, STOOMWEZEN, CCS;
硬度测试：BRINELL(HB) VICKERS(HV), ROCKWELL(HRC); 拉力测试：(+20° C到+400° C) ;
冲击测试：(-70° C到+400° C) 压扁测试，喇叭状，环状测试；
无损探伤测试：X-射线，超声波，磁粉等； 水压测试
- 5、唛头和标识：所有产品都有永久性的标识，硬刻，激光，喷码等，标签或挂片，保护层标识，钢管塑料封套标识，不锈钢标识。
- 6、包装和运输：特制容器，木质托盘，出口包装，薄膜收缩包装，卡车门对门运输，限时到达运输服务，包裹托运。
- 7、壁厚计算：可以为客户提供合适壁厚参考（据管线压力，介质，要求，标准等）。

Bends & Forged Fittings

Flanges:

Standards:

ASTM/ANSI/ASTM B16.5 and B16.47 Series A+B

BS STD 3293 JIS GB DIN2638

Type:

Welding Neck Flanges, Blind Flanges, Slip on Flanges, Threaded Flanges, Orifice Flanges, Lap Joint Flanges, Plate Flange, Long welding Neck Flanges, etc. Special Flanges acc. To drawings.

Pressure Types:

From 150 up to 2500 lbs

Forged fittings' pressure Types:

CL2000-CL9000

Material Grades:

Mones. Ti, Al, Inconel, A182 F304+ F304L+ F316+ F316L F91, F12, F11, WPL6, A105 and so on, or produce the forged fittings as the clients' requirements.

Coating, Blasting and Marking:

Facings and Finishes, Coating, Blasting and Marking: to all requirements according to customers' specifications.
Dimensions: From 1/2 " up to 100 "

Bends:

Size:

From 1/2" up to 100"

Up to 100" O.D. x 200mm THK

Material:

Stainless Steel

WP 304 / 304L, WP 316/316L, WP 321/H

Carbon Steel

A106-B, A53-B, A210-C, A333-6, A335-P1/P2, P11, P22, P5, P9, P91, ST325.8, ST37, ST52.4, 1.0356, 1.7335, S355 series, A199-T22, API5L Gr.B, X42, X46, X52, X56, X60, X65, X70, X80 and so on



ADVANTAGE

1. Production and storage: 6500 ton steel pipe, pipe fittings and flange. GB, ASME, DIN, JIS Seamless and welding Material: Carbon steel, low temperature steel, stainless steel and alloy steel
2. Mechanical: processing Surface processing, outside and inside processing, threaded processing Chamfering, cutting elbow for different angles, and elbow chamfering into different shapes, Steel tube heat bending, pipeline processing, combination
3. Anticorrosive processing: Pickling and passivation, Galvanized, heat treatment, sandblasting, rolling sand, etc
4. Material inspection:
Third party inspection: 3.1A TUV, 3.1C TUV, GL, LRS, DNV, BV, ABS, RINA, STOOMWEZEN, CCS
Hardness testing: BRINELL (HB), VICKERS (HN), ROCKWELL (HRC)
Tensile tests: from +20 °C to +400 °C
Impact tests: from -70 °C to +400 °C
Squish test, bell shape, ring test
NDT test, X-ray, ultrasonic, magnetic powder, etc
Hydrotest
5. Marks and logos: All products have permanent identifier, Hard carve, laser, Spraying the code Tag or hang piece, protection logo Steel pipe plastic covers logo Stainless steel logo.
6. Packaging and transportation: Special containers Wooden pallets Export package Shrink film wrapping system Trucks door to door transportation Limited reach transportation service Parcel shipping service
7. Wall thickness calculation: We can provide the appropriate wall thickness for your reference according to the line pressures and mediums, requirements, standards, etc.