

WDF SERIES FLAT ROOF MOUNTING

Features:

Applicable for Different Roofs

Design project by project, selecting configuration mounting system components flexibly.

Save Installation Time and Cost

Pre-assembled components and clear installation manual are supplied to save the onsite installation time and Cost, lead to better Rol .

Compatible to Different Types of Solar Modules


Compatible to most kinds of framed 60-cell, 72-ell, half-cut cells modules and frameless modules.



Main Specification

Installation Site	Roof	Body Material	Aluminum-6005-T5
Tilt Angle	5-60°C	Bolt Material	SUS304
Max Wind Force	≅ 60m/s	Base Material	Q235/Cement
Snow Load	≅ 1.4KN/m ²	Surface Treatment	Anodized
Roof Type	Flat Roof	Warranty	10 Years
Module Directions	Portrait	Design Standard	AS/NZ 1170,JIS C8955 2017, DIN 1055 ,IBC 2006
	Landscape		

Pre-assembled Rack

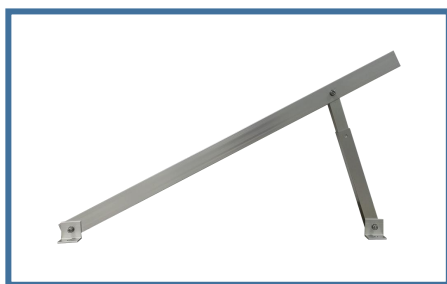


A Type



AT Type



T Type



Rail



Rail



Rail Splice



Rail Clamp



Mid Clamp



End Clamp