




VALVE SIZE	DIMENSION IN mm.							
	d	L	D	D1	D2	T	f	n-Ød
3"-150LB	74	203	190	152.4	127	17.5	2	4-Ø19

NOTES:

1. The fire safe is designed in accordance with API 607.
2. DBB

Performance Standard		
Nominal CL (PN)	150LB	Test medium
Shell test pressure	3.0MPa	Water
Seal test pressure	2.2MPa	
Air test pressure	0.6MPa	Air
Suitable temperature	-29~120°C	
Suitable medium	Water/Steam/Oil etc	

PO ITEM: 12

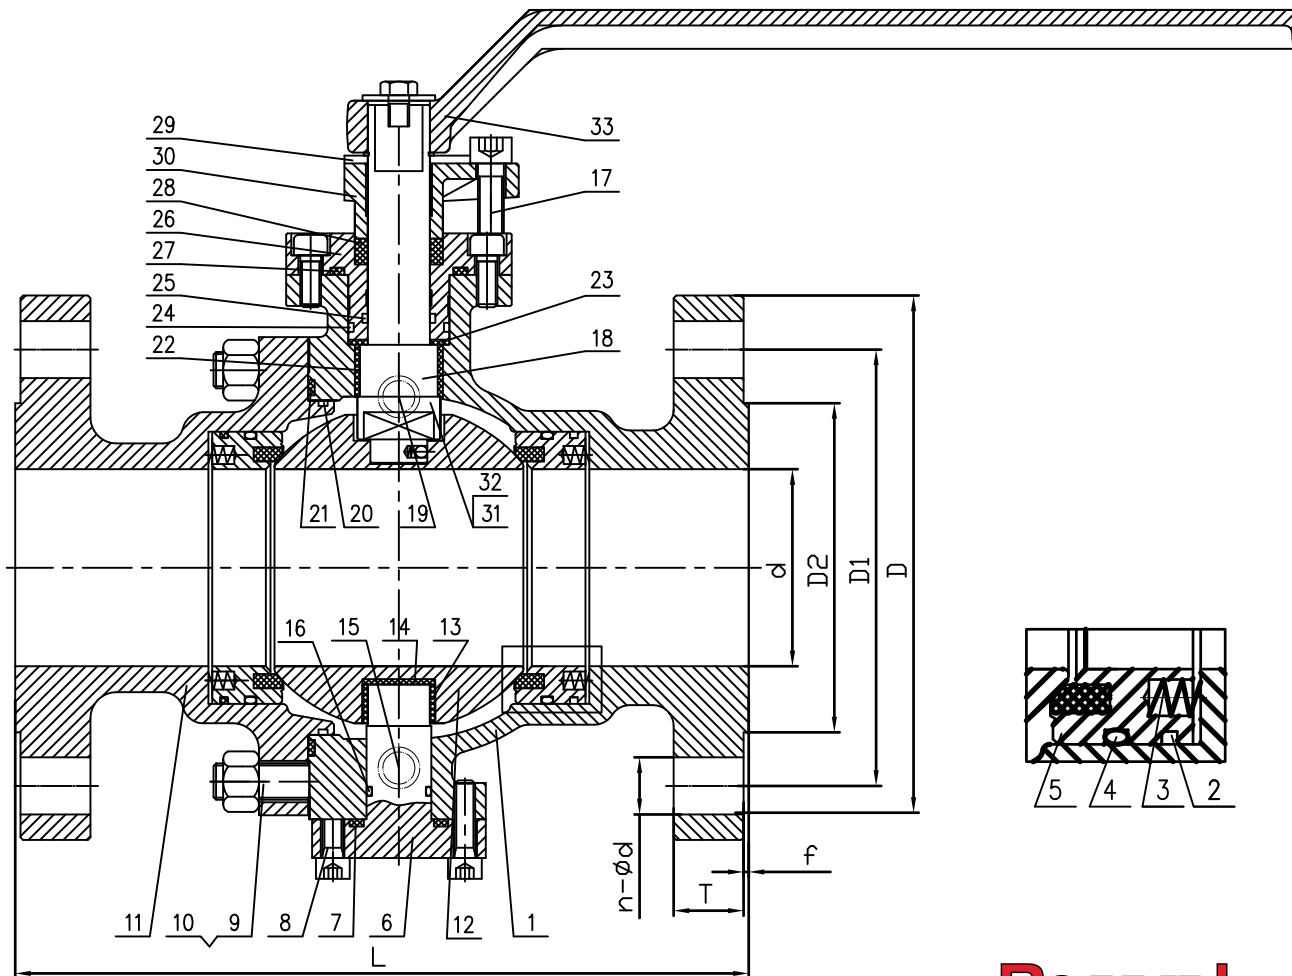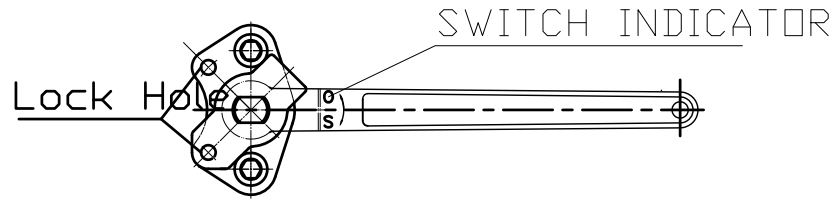

32	Handle	A216 WCB	
32	Anti Static Spring	SS	
31	Anti Static Ball	SS	
30	Packing Gland	A216 WCB	
29	The limiting block	1025+Zn	
28	Packing	flexible graphite	
27	Gasket	SS304+graphite	
26	Gland Cover	A105+ENP	
25	O-ring	Viton	
24	O-ring	Viton	
23	Gasket	PTFE	
22	sliding bearing	Metal Backed PTFE	
21	Gasket	SS304+graphite	
20	O-ring	Viton	
19	Vent Valve	assembling unit	
18	Stem	A182 F6a	
17	Screw	A193 B7	
16	O-ring	Viton	
15	Drain Plug	assembling unit	
14	Gasket	PTFE	
13	sliding bearing	Metal Backed PTFE	
12	Ball	A182 F6a	
11	Bonnet	WCB	
10	Nut	A194 2H	
9	Bolt	A193 B7	
8	Screw	A193 B7	
7	Gasket	SS304+graphite	
6	Fixed axis	A105	
5	Seat	A182 F6a+RPTFE	
4	O-ring	Viton	
3	Spring	Inconel X-750	
2	Gasket	flexible graphite	
1	Body	WCB	
NO.	PARTS NAME	MATERIAL	REMARK

TRUNNION BALL VALVE

Size	3"	Design&Manu	API 6D
Class	150Lb	Inspection&Test	API 598
Rev.	00	End Connection	ASME B16.5 RF
Man.Fig.		Face-to-face dimension	ASME B16.10

**Bosseal** Valves

Bosseal Valve(Suzhou) Co., Ltd