


SIZE	DN	d	L	D	D1	D2	T	f	n- ϕ d	Weight(Kg)	TAG No.
1.1/2"-600LB	40	38	241	155	114.3	73	22.3	7	4-22	15	BF2C30SARRFFENI040

Notes:

NACE MR-01-75

Performance Standard		
Nominal CL (PN)	600LB	Test medium
Shell test pressure	15.0MPa	Water
Seal test pressure	11.0MPa	
Air test pressure	0.6MPa	Air
Suitable temperature	-29~120°C	
Suitable medium	Water/Oil/Natural Gas etc	

NPS	ISO 5211	A1	N-M
1.1/2	F05	50	4-M6

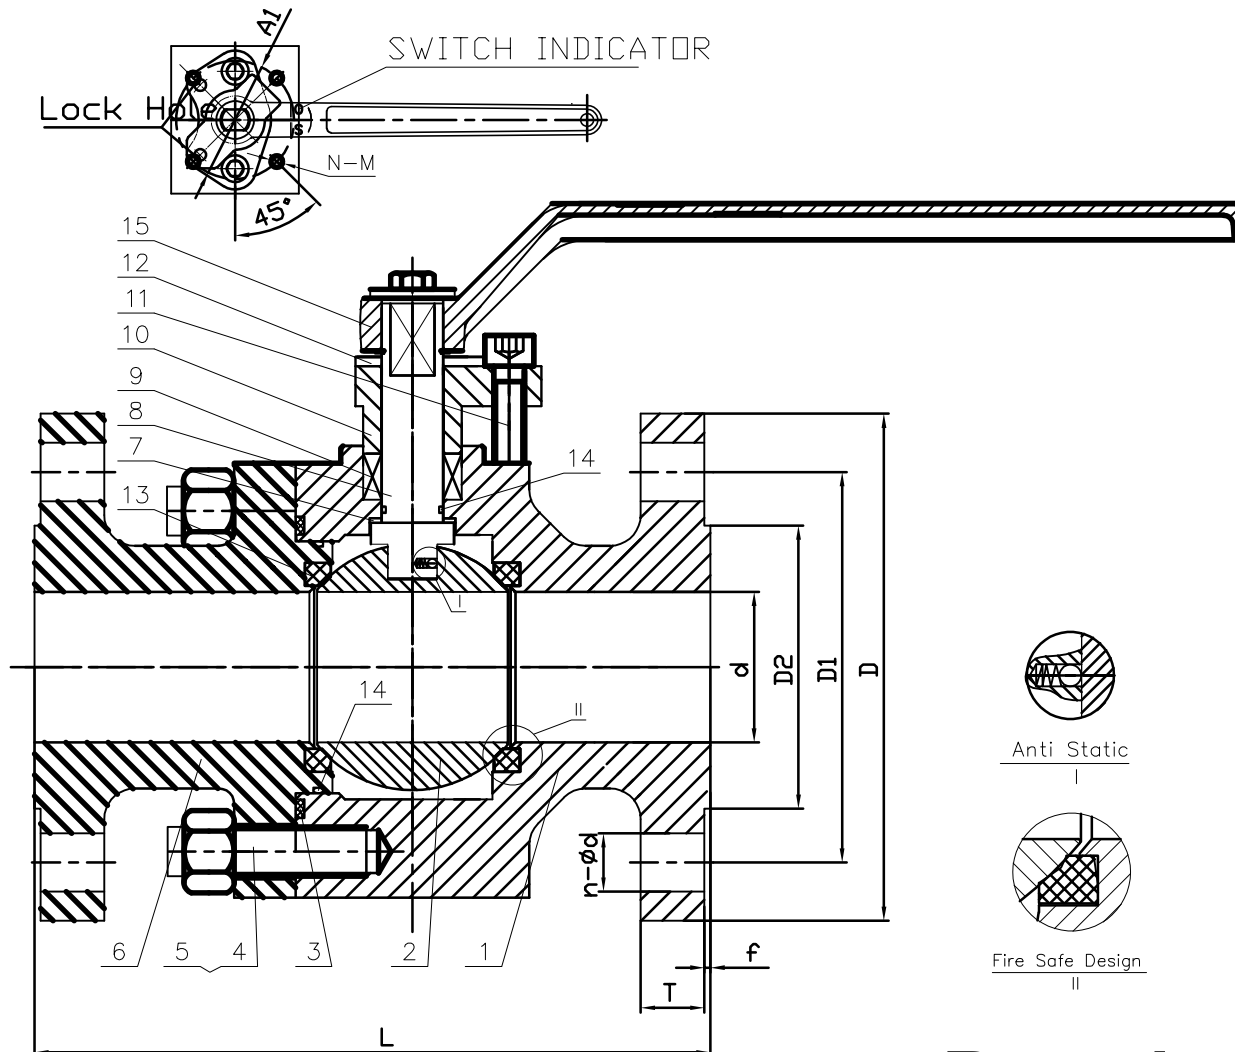

15	handle	A216 WCB	
14	O-Ring	VITON AED	
13	Seat	RPTFE	
12	Limiting block	1025+Zn	
11	Screw	A193 B7M+Zn	
10	Packing Gland	A216 WCB	
9	Packing	Graphite	
8	Stem	17-4PH	
7	Gasket	PTFE	
6	Bonnet	ASTM A105N	
5	Nut	A194 2HM+Zn	
4	Bolt	A193 B7M+Zn	
3	Gasket	SS316+Graphite	
2	Ball	A182 F316	
1	Body	ASTM A105N	
NO.	PARTS NAME	MATERIAL	REMARK

Floating Ball Valve

Size	1-1/2"	Design&Manu	API 6D
Class	600Lb	Inspection&Test	API 6D
Rev.	00	End Connection	ASME B16.5-RF
Man.Fig.		Face-to-face dimension	ASME B16.10

Bosseal Valves

Bosseal Valve(Suzhou) Co., Ltd