


VALVE SIZE	DIMENSION IN mm.						
	d	D	D1	D2	tf	n- ϕ d	L
2"-600LB	50	165	127	92.1	25.4	8- ϕ 19	292

Performance Standard		
Nominal CL (PN)	600LB	Test medium
Shell test pressure	15.3MPa	Water
Seal test pressure	11.2MPa	
Air test pressure	0.6MPa	Air
Suitable temperature	-10~400°C	
Suitable medium	Water/Steam/Oil etc	

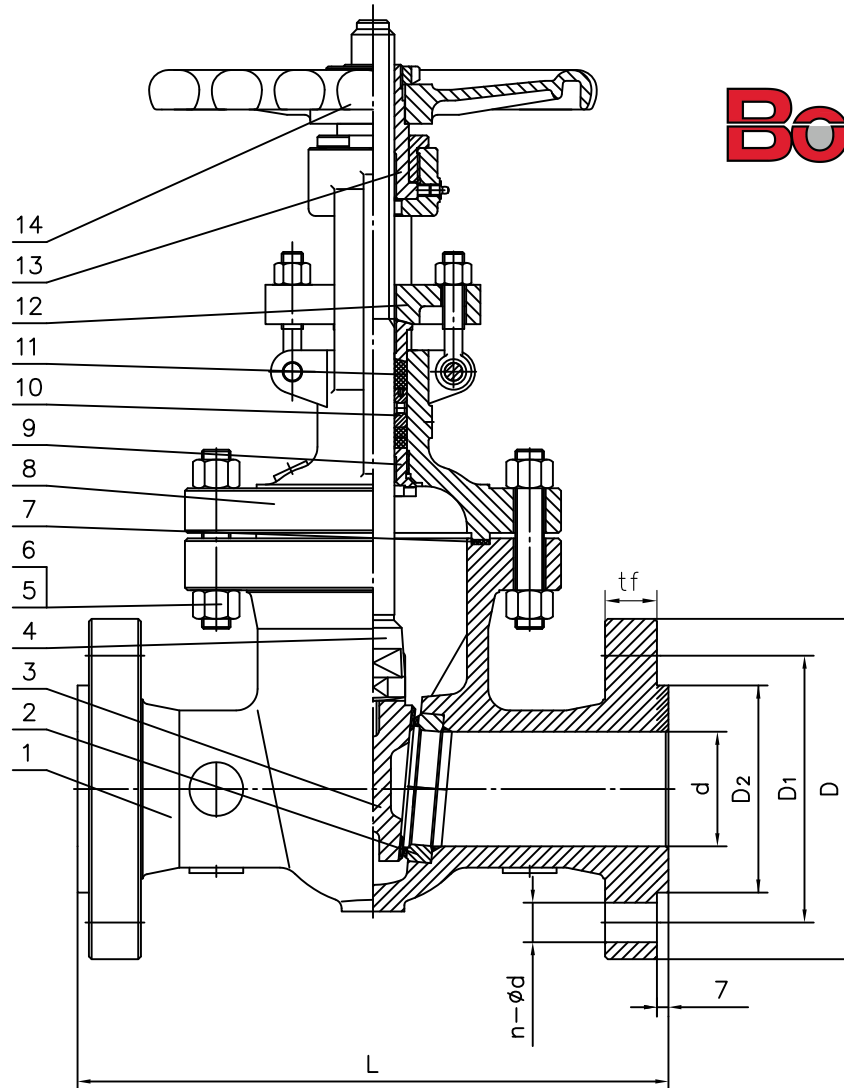

Bosseal Valves

14	Hand Wheel	ASTM A536 60-40-18	
13	Stem Nut	Copper Alloy	
12	Gland Flange	Carbon Steel	
11	Stem Packing	Graphite With inconel wire	
10	Packing ring	ASTM A276 420	
9	Backseat Bushing	ASTM A276 420	
8	Bonnet	ASTM A216 WCB	
7	Winded Gasket	Graphite+SS304	
6	Bonnet Nut	ASTM A194 2H	
5	Bonnet Bolt	ASTM A193 B7	
4	Stem	ASTM A182 F6a	
3	Flexible Wedge	ASTM A217 CA15+STL	
2	Seat Ring	ASTM A182 F6A+STL	
1	Body	ASTM A216 WCB	
NO.	PARTS NAME	MATERIAL	REMARK

GATE VALVE			
Size	2"	Design&Manu	API 600
Class	600Lb	Inspection&Test	API 598
Rev.	00	End Connection	ASME B16.5 RF
Man.Fig.		Face-to-face dimension	ASME B16.10

Bosseal Valve(Suzhou) Co., Ltd