


Nominal Diameter		Main Dimension (mm) class600								
inch	mm	d	D	D1	D2	b	n- $\phi$ d	L	H	
2"	50	51	165	127.0	92	26	8- $\phi$ 19	292	141	
2 1/2"	65	64	190	149.2	105	29	8- $\phi$ 22	330	173	
3"	80	76	210	168.3	127	32	8- $\phi$ 22	356	192	
4"	100	102	275	215.9	157	38	8- $\phi$ 26	432	222	
5"	125	127	330	266.7	186	45	8- $\phi$ 29	508	253	
6"	150	152	356	292.1	216	48	12- $\phi$ 29	559	282	
8"	200	200	420	349.2	270	56	12- $\phi$ 32	660	356	
10"	250	248	510	431.8	324	64	16- $\phi$ 35	787	403	
12"	300	298	560	489.0	381	67	20- $\phi$ 35	838	462	
14"	350	327	605	527.0	413	70	20- $\phi$ 38	889	496	
16"	400	375	686	603.2	470	77	20- $\phi$ 41	991	592	
18"	450	419	745	654.0	533	83	20- $\phi$ 45	1092	596	
20"	500	464	815	723.9	584	89	24- $\phi$ 45	1194	662	
24"	600	559	940	838.2	692	102	24- $\phi$ 51	1397	822	

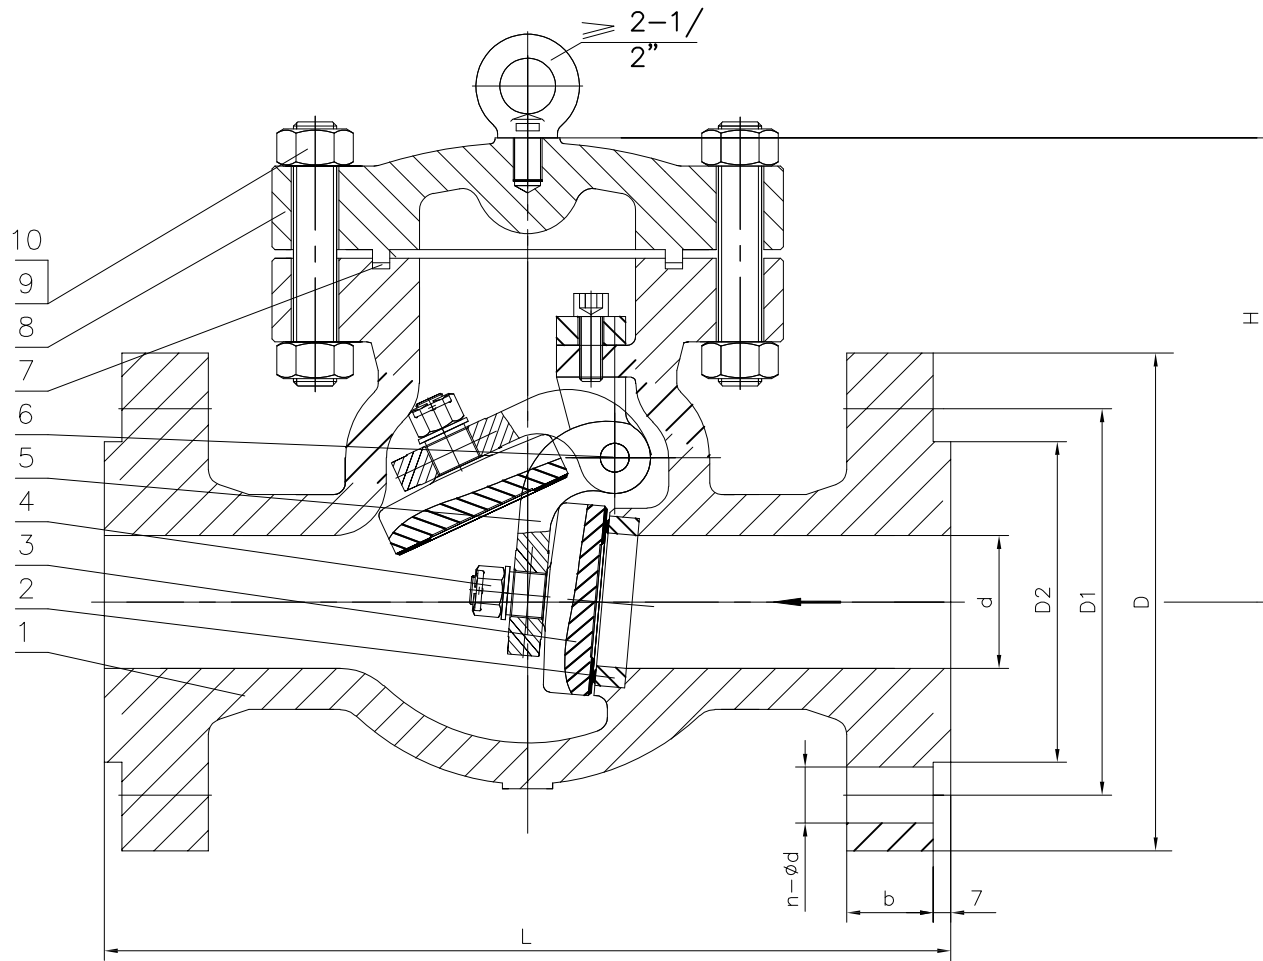

SWING CHECK VALVE CLASS600	
Design and Manufacture	BS 1868
Face to Face Dimensions	ANSI B16.10
Flanger Ends Dimensions	ANSI B16.5
Pressure Test	API 598
Bosseal Valve(Suzhou) Co., Ltd	