


SIZE	L	G	C	N-E	A	B	L1	L2	W	Unit Weight
14"	92	412.8	470	12-M24 (through)	530	300	275	81	400	99.5Kg

Performance Standard		
Nominal CL (PN)	150LB	Test medium
Shell test pressure	3.0MPa	Water
Seal test pressure	2.2MPa	
Air test pressure	0.6 MPa	Air
Suitable temperature	-29~180℃	
Suitable medium	Water/Steam/Oil etc	

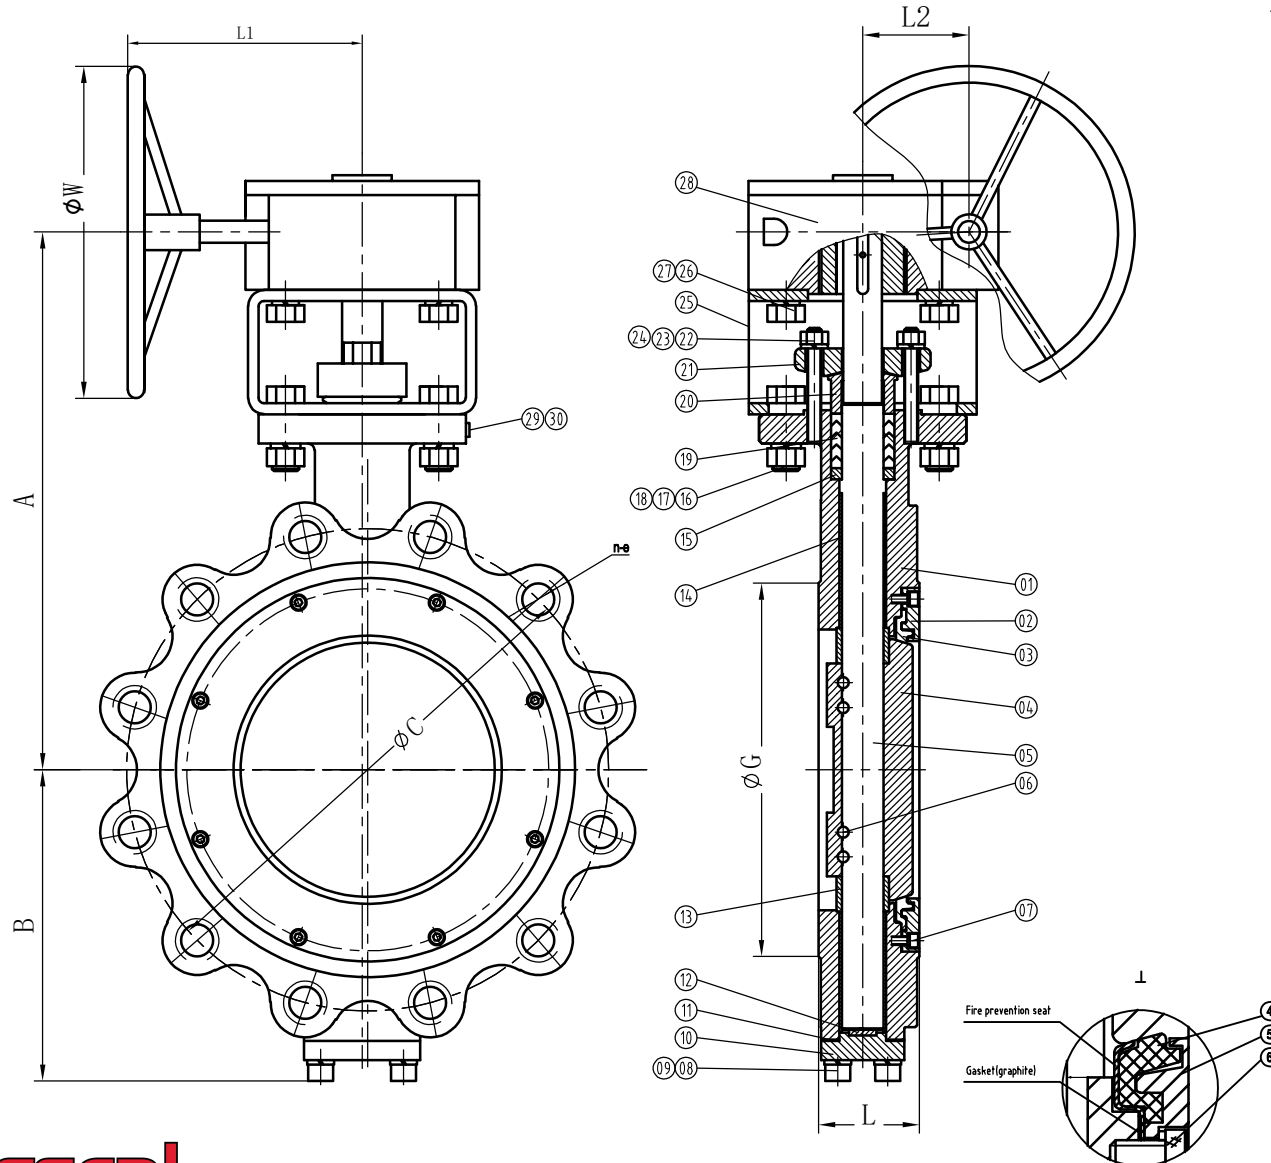

Technical Notes:

Temperature & pressure standards: ASME B16.34
 Painting: PHOSPHATION, color in black.
 BI-DIRECTIONAL TIGHTNESS

NO.	PARTS NAME	MATERIAL	REMARK
30	NAMEPLATE	316SS	
29	RIVET	316SS	
28	GEAR BOX	PARTS	
27	WASHER	65Mn	
26	BOLT	ASTM A193 B7	
25	YOKE	C.S	
24	WASHER	65Mn	
23	NUT	ASTM A194 2H	
22	BOLT	ASTM A193 B7	
21	GLAND FLANGE	ASTM A105 A105N	
20	GLAND	ASTM A276 304	
19	PACKING	Graphite Low fugitive Emission	
18	WASHER	65Mn	
17	NUT	ASTM A194 2H	
16	BOLT	ASTM A193 B7	
15	SPACER RING	ASTM A276 304	
14	BEARING	RPTFE	
13	DISC WASHER	ASTM A276 304	
12	WASHER	ASTM A276 304 HF	
11	GASKET	GRAPHITE	
10	BOTTOM COVER	ASTM A105 A105N	
09	WASHER	65Mn	
08	STD	ASTM A193 B7	
07	STD	ASTM A193 B7	
06	PIN	SS	
05	STEM	17-4PH	
04	DISC	ASTM A351 CF8M	
03	SEAT	316+RPTFE	
02	RETAINER RIN	ASTM A105 A105N	
01	BODY	ASTM A216 WCB	

Double Offset Butterfly Valve

Size	14"	Design&Manu	API 609 B
Class	150LB	Inspection&Test	API 598
Rev.	00	End Connection	LUG-FF TABLE E
Man.Fig.		Face-to-face dimension	API 609

Bosseal Valve(Suzhou) Co., Ltd