




YAAO VALVE

Gate Valve Bolted Bonnet & Welded Bonnet

800LB

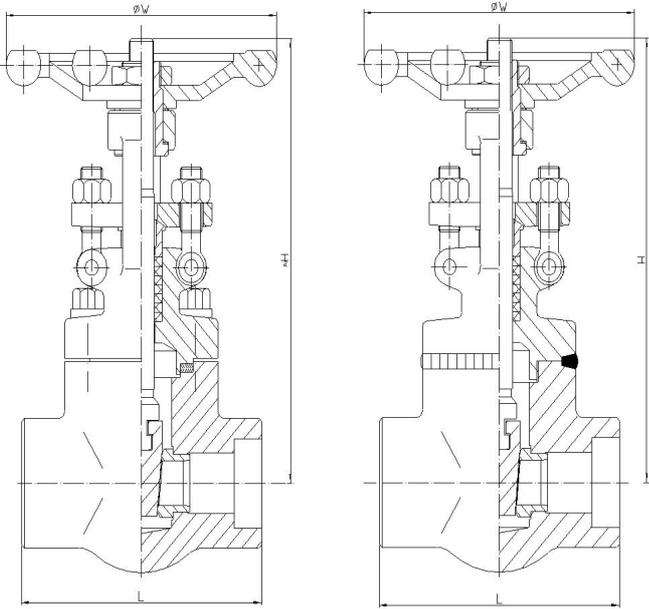

Design and Manufacturing: ASME B16.34, API602

Construction Type: BB, OS&Y

WB, OS&Y

Construction Length: MFR'S STD

End Connection: ASME B16.11 SW

ASME B1.20.1 NPT

Body Material: ASTM A105

ASTM A350-LF2

ASTM A182-F11/F12/F22/F5/F91

ASTM A182-F304/F304L/F316/F316L

ASTM A182-F321/F321H

Inspection and Testing: API598

Marking: MSS SP25

Standard Port

NPS	1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	2
DN	8	10	15	20	25	32	40	50
L (mm)	79	79	79	92	111	120	120	140
H/open(mm)	158	158	158	163	190	227	245	284
W (mm)	100	100	100	100	125	160	160	180
Weight (kg)	1.9	1.9	1.9	2.1	3.2	6.9	7.1	10.4

Full Port



NPS	1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	2
DN	8	10	20	25	32	40	50	50
L (mm)	79	79	92	111	120	120	140	178
H/open(mm)	158	158	163	190	227	245	284	327
W (mm)	100	100	100	125	160	160	180	235
Weight (kg)	1.9	1.9	2.1	3.2	6.9	7.1	10.4	15.8



YAAO VALVE

Gate Valve Bolted Bonnet & Welded Bonnet

1500LB

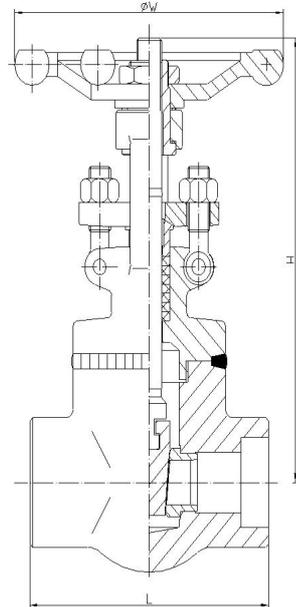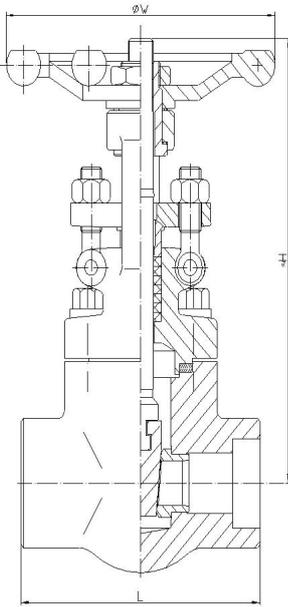

Design and Manufacturing: ASME B16.34, API602

Construction Type: BB, OS&Y
WB, OS&Y

Construction Length: MFR'S STD SW & NPT

ASME B16.10 BW

End Connection: ASME B16.11 SW

ASME B1.20.1 NPT

ASME B16.25 BW

Body Material: ASTM A105

ASTM A350-LF2

ASTM A182-F11/F12/F22/F5/F91

ASTM A182-F304/F304L/F316/F316L

ASTM A182-F321/F321H

Inspection and Testing: API598

Marking: MSS SP25

Standard Port

NPS		1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	2
DN		8	10	15	20	25	32	40	50
L (mm)	SW/NPT	92	92	111	111	120	120	140	178
	BW			216	229	254	279	305	368
H/open(mm)		163	163	185	190	227	245	284	327
W (mm)		100	100	125	125	160	160	180	235
Weight (kg)	SW/NPT	2.1	2.1	3.0	3.2	6.9	7.1	10.4	15.8
	BW			4.0	4.0	7.5	9.0	16.0	19.0

Learn more Valve products on <http://www.yaaovalve.com/>

Copyright: Shanghai Yaa Valve Co., Ltd.