



**SAFX2**  
(SA2-Fitted)

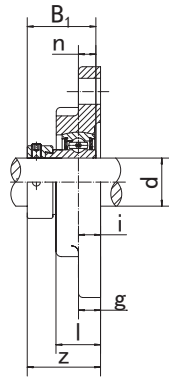


SAFX2

**Flange Unit**  
(Light duty)

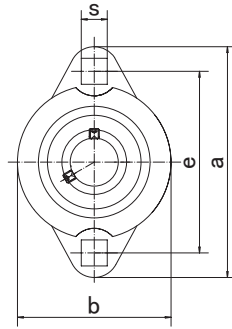

**SBFX2**  
(SB2-Fitted)

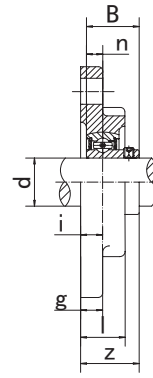

SBFX2

Unit NO.	Dimensions ( mm / in. )											Bolt Size mm/in.	Bearing No.	Housing No.	Weight (kg)
	d	a	e	b	i	s	g	l	z	B <sub>1</sub>	n				
SAFX 201 201-8	12 1/2	81 3-3/16	63.5 2-1/2	55 2-3/16	10.5 13/32	7.2 9/32	10.5 13/32	17.5 11/16	32.6 1-9/32	28.6 1.1260	6.5 0.2559	1/4	SA201	FX201	0.22
SAFX 202 202-9 202-10	15 9/16 5/8												SA202		
SAFX 203 203-11	17 11/16												SA203		
SAFX 204 204-12	20 3/4	90.5 3-9/16	71.5 2-13/16	57 2-1/4	10.5 13/32	8.7 11/32	11 7/16	20 25/32	34 1-11/32	31 1.2204	7.5 0.2953	5/16	SA204	FX204	0.36
SAFX 205 205-13 205-14 205-15 205-16	25 13/16 7/8 15/16 1	95 3-3/4	76 2-63/64	63.5 2-1/2	11 7/16	8.7 11/32	11 7/16	20 25/32	34.5 1-23/64	31 1.2204	7.5 0.2953	5/16	SA205	FX205	0.40
SAFX 206 206-17 206-18 206-19 206-20	30 1-1/16 1-1/8 1-3/16 1-1/4	113 4-7/16	90.5 3-9/16	75 2-15/16	11 7/16	10.3 13/32	12 15/32	22.5 57/64	37.7 1-31/64	35.7 1.4055	9 0.3543	3/8	SA206	FX206	0.60
SAFX 207 207-20 207-21 207-22 207-23	35 1-1/4 1-5/16 1/3/8 1-7/16	122 4-13/16	100 3-15/16	86 3-3/8	12 15/32	10.3 13/32	13 33/64	24 61/64	41.1 1-5/8	38.9 1.5315	9.5 0.3740	3/8	SA207	FX207	0.84

Unit NO.	Dimensions ( mm / in. )											Bolt Size mm/in.	Bearing No.	Housing No.	Weight (kg)
	d	a	e	b	i	s	g	l	z	B	n				
SBFX 201 201-8	12 1/2	81 3-3/16	63.5 2-1/2	55 2-3/16	10.5 13/32	7.2 9/32	10.5 13/32	17.5 11/16	26.5 1-3/64	22 0.8661	6 0.2362	1/4	SB201	FX201	0.20
SBFX 202 202-9 202-10	15 9/16 5/8												SB202		
SBFX 203 203-11	17 11/16												SB203		
SBFX 204 204-12	20 3/4	90.5 3-9/16	71.5 2-13/16	57 2-1/4	10.5 13/32	8.7 11/32	11 7/16	20 25/32	28.5 1-1/8	25 0.9843	7 0.2756	5/16	SB204	FX204	0.33
SBFX 205 205-13 205-14 205-15 205-16	25 13/16 7/8 15/16 1	95 3-3/4	76 2-63/64	63.5 2-1/2	11 7/16	8.7 11/32	11 7/16	20 25/32	30.5 1-13/64	27 1.0630	7.5 0.2953	5/16	SB205	FX205	0.36
SBFX 206 206-17 206-18 206-19 206-20	30 1-1/16 1-1/8 1-3/16 1-1/4	113 4-7/16	90.5 3-9/16	75 2-15/16	11 7/16	10.3 13/32	12 15/32	22.5 57/64	33 1-19/64	30 1.1811	8 0.3150	3/8	SB206	FX206	0.55
SBFX 207 207-20 207-21 207-22 207-23	35 1-1/4 1-5/16 1/3/8 1-7/16	122 4-13/16	100 3-15/16	86 3-3/8	12 15/32	10.3 13/32	13 33/64	24 61/64	35.2 1-25/64	32 1.2598	8.5 0.3364	3/8	SB207	FX207	0.80

Note: To specify relubricatable units, add "G" suffix, (e.g., SBFX205-16G)